
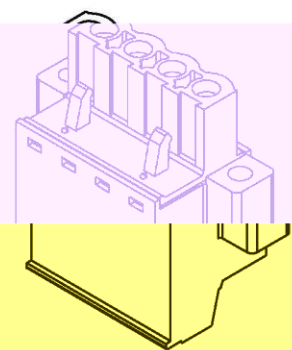


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	增加脱模斜度	XLM	2012/02/10
②	第一次增加无效果, 再次增加脱模斜度	XLM	2012/02/22
③	增加螺丝和螺母的咬合长度	LDD	2013/07/29
④	防止螺丝在使用中倾斜	LDD	2013/11/08
⑤	改善盖板和本体的匹配	LDD	2014/12/10

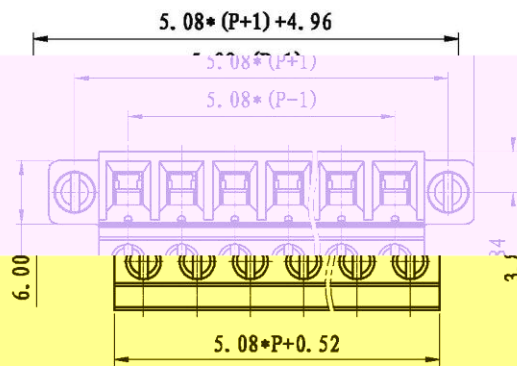

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 5MΩ or more at DC500V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 30-12AWG
7. Screw Torque Value: 0.4N.m

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 额定电流: 15A
3. 耐受电压: AC 2500V/min
4. 绝缘电阻≥5MΩ
5. 使用条件: -40° ~ +105°
6. 适用线规: 30-12AWG
7. 扭矩值为: 0.4N.m

