



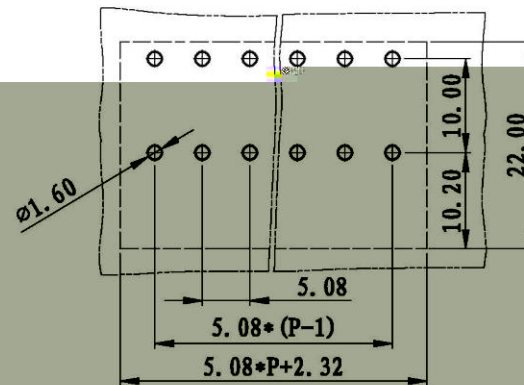


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

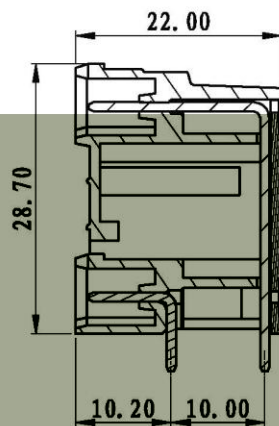

NOTES:
 Pitch : 5.08 mm
 Rated Voltage : 300 V
 Rated Current : 15A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃ ~+105℃

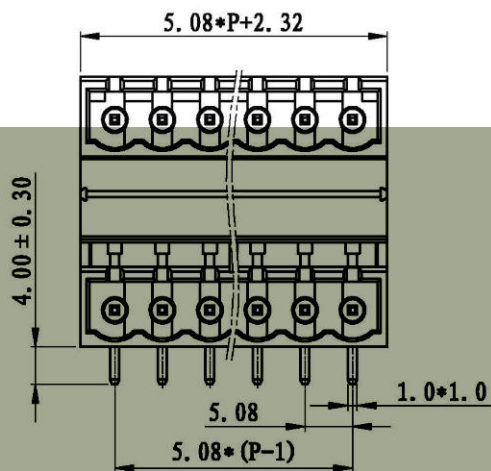

4	LZ3H-5.08-长弯针	1031B0001AV	P	黄铜	镀锡铜
3	LZ1-5.08-弯针(1.3)	1015B0008AV	P	黄铜	镀锡铜
2	LZ2H-5.08-盖板	1022C0000AV	1	PC	