


REVISION RECORD			
REV.	CONTENT.	MOD.	DATE
①	初版发行		

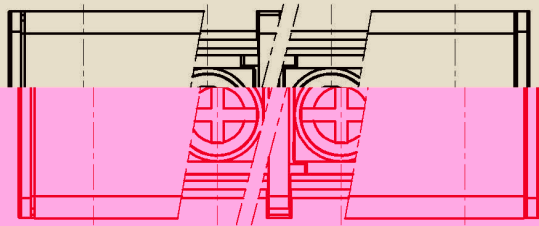

NOTES:
 Pitch : 10.0mm
 Rated Voltage : 300V
 Rated Current : 20 A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +130℃
 Wire range : 22~12 AWG
 Screw Torque Value : 1.2Nm

技术要求:
 间距: 10.0mm
 额定电压: 300V
 额定电流: 20A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+130℃
 适用线规: 22~12 AWG
 螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					Tolerance
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 15	0 to 30	30 to 60	60 to 100	100 to 150		0.05/10
tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

Z	LW2B-10.0-XP	5002B0002AV	P	黄铜	镀锡
1	LW2B-10.0-XP	5002B0002AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DBS.	ARKINE	DATE	11-03-25	UNITS	MM
DATE	DATE	SCALE	1:1	DWG NO.	SP-2-5011002
APP.				REV:	V0
上海联捷电气有限公司 Shanghai Blinker Electric Co., Ltd.				TITLE	LW2B-10.0-XP-1Y-00A LW2B-10.0-成品