

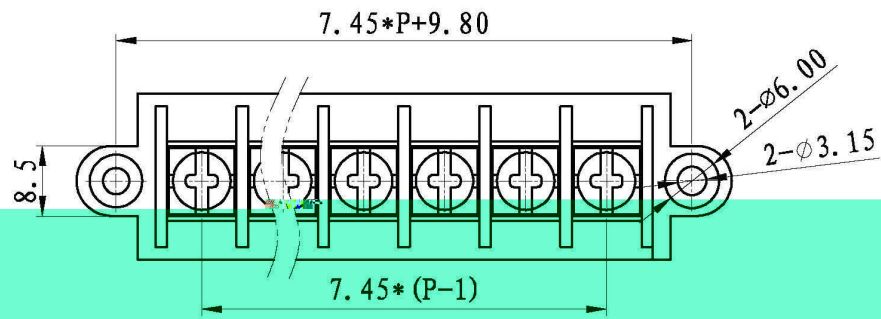
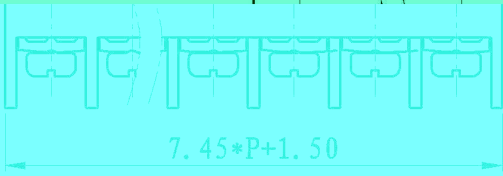


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

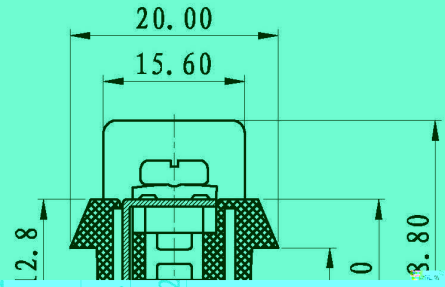

性能:  
 额定电压: 600V  
 额定电流: 15A  
 耐电压值: AC3000V/min  
 绝缘阻抗:  $5M\Omega/DC500V$   
 使用条件:  $-40^{\circ}C \sim +105^{\circ}C$   
 额定线规:  $1.5mm^2$

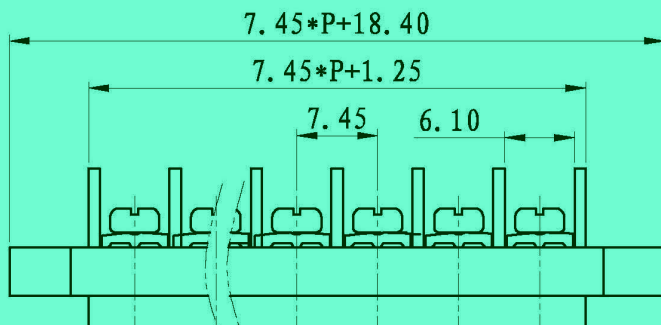

4.	M3外六角螺母	SM00A300001V	2P	碳钢	镀锌
3.	M3*8-6-6	SPPFA308022V	2P	碳钢	三价铬钝化彩锌
2.	JSJ-1.5导电件	6JSJBD015AV	P	黄铜	镀锌
1.	JSJ-1.5壳	6JSJBS11516V	1	PC	