




2P-双卡扣

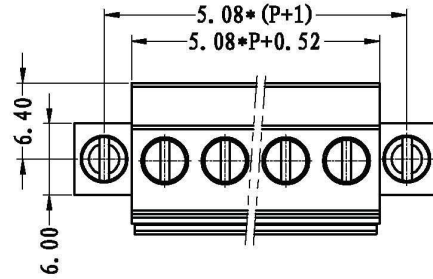



REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	2P侧勾更改	XLM	11/09/15
△	盖板容易脱落0.5改为0.7	XLM	11/09/13
△	卡点移位, 上边下-0.1MM	XLM	12/03/08
△	改善本体弯曲	LDD	12/08/25

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 5.08mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 5MΩ or more at DC1000V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 30-12AWG
7. Screw Torque Value: 0.5N.m以上



2P-单卡扣

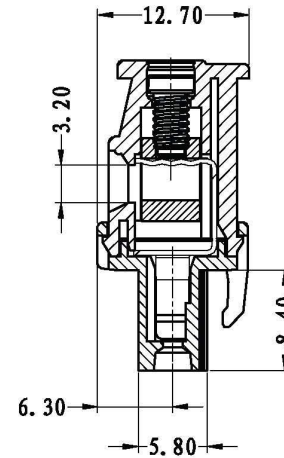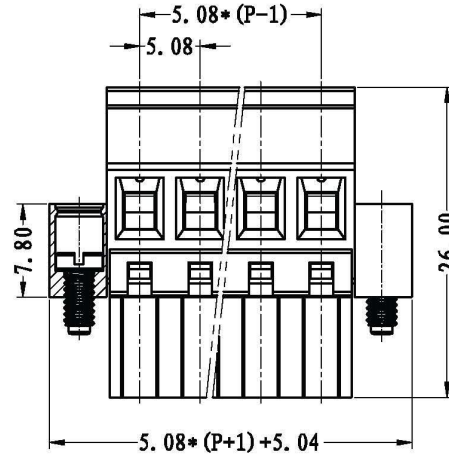

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 5.08mm
3. 耐受电压: AC 2500V/min
4. 绝缘阻抗: 5兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 30-12AWG
7. 螺丝扭力: 0.5N.m以上

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6.	LC1-耳朵螺丝	SPOYA255301V	2	碳钢	三价铬钝化彩锌
5.	LC1-5.08-螺丝	SPOYB305503V	P	碳钢	三价铬钝化彩锌
4.	LC2-5.08-夹子	1006B0001AV	P	磷青铜	镀镍
3.	LC1-5.08-铜方块	F1A0BLC5083V	P	黄铜	镀镍
2.	LC2-5.08-盖子	1006C0YXXAV	1	PA66-V0	
1.	LC2M-5.08-主体	1006M0YXXAV	1	PA66-V0	

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/10/12	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1

上海联捷电气有限公司
Shanghai Bliinker Electric Co

TITLE

LCRM-5.08-XXP-1Y-00A
LC2BM-5.08-成品

THIRD ANGLE PROJECTION
SHEET 1 of 1
DWG NO. SP-2-1006004
REV: V4