

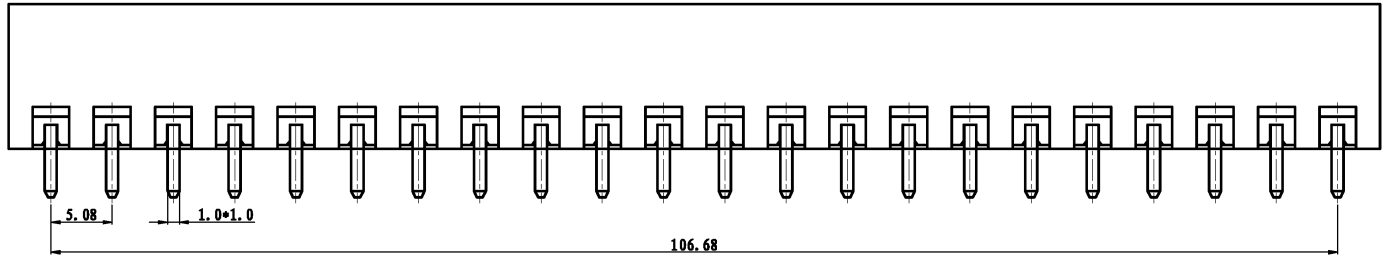
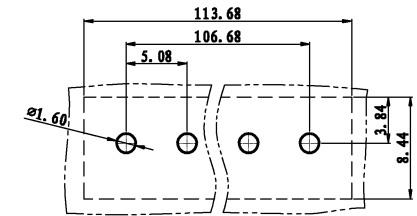



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

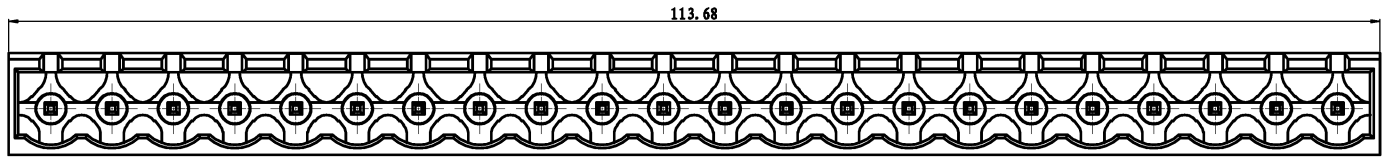

**NOTE:**  
 Pitch: 5.08mm  
 Rated Voltage: 200V  
 Rated Current: 15A  
 Withstand Voltage:  
 AC2500V for 1 minute  
 Insulation Resistance:  
 500 / DC500V  
 Using Temperature Range:  
 -40°C ~ +105°C  
**技术要求:**  
 间距: 5.08mm  
 额定电压: 200V  
 额定电流: 15A  
 耐受电压: AC2500V/min  
 绝缘电阻: 500/DC500V  
 使用条件: -40°C ~ +105°C

	pitch dimension			Nominal dimension					—
	over	over	over	over	over	over	over	over	
variable	0	6	10	0	30	60	100	150	□
range	to	to	to	to	to	to	to	to	○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1-5.08-直针(1.2)	1015B0002AV	P	黄铜	镀雾锡
1	LZ1-5.08-本体	1015A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINB	DATE	2010/5/20	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-1-1015001
				REV:	T0
 <b>上海联捷电气有限公司</b> Shanghai Elinker Electric C.O.,LTD				TITLE	LZ1V-5.08-22P-1Y-00A
					LZ1V-5.08-成品