

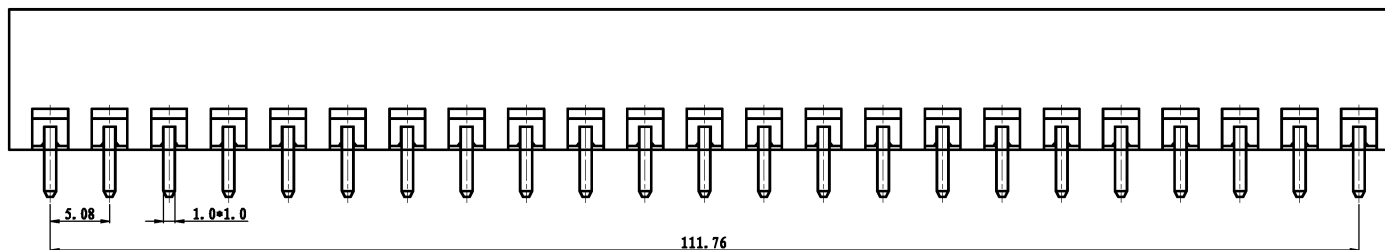
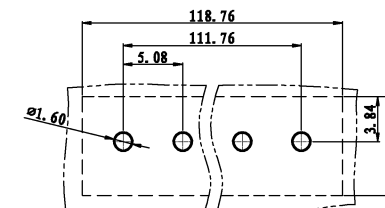


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

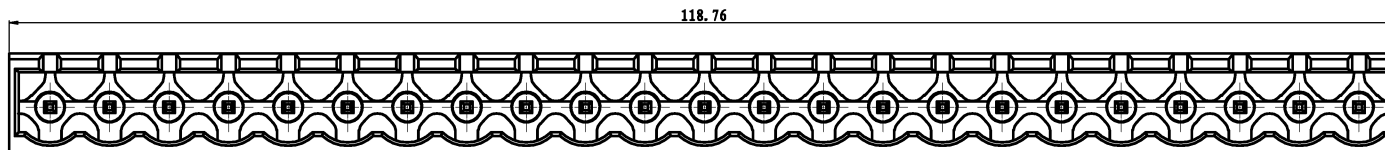

**NOTES:**  
 Finish: 5.08mm  
 Rated Voltage: 300V  
 Rated Current: 15A  
 Withstand Voltage:  
 AC2500V for 1 minute  
 Insulation Resistance:  
 5M $\Omega$ /DC500V  
 Using Temperature Range:  
 -40℃ ~ +105℃

**技术要求:**  
 间距: 5.08mm  
 额定电压: 300V  
 额定电流: 15A  
 耐压值: AC2500V/min  
 绝缘阻抗: 5M $\Omega$ /DC500V  
 使用条件: -40℃ ~ +105℃

	pitch dimension			Nominal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	□	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	○	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1-5.08-直针(1.2)	1015B0002AV	P	黄铜	镀锡
1	LZ1-5.08-本体	1015A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINB	DATE 2010/5/20	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-1-1015001 REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric C.O., LTD				TITLE	LZ1V-5.08-23P-1Y-00A LZ1V-5.08-成品