

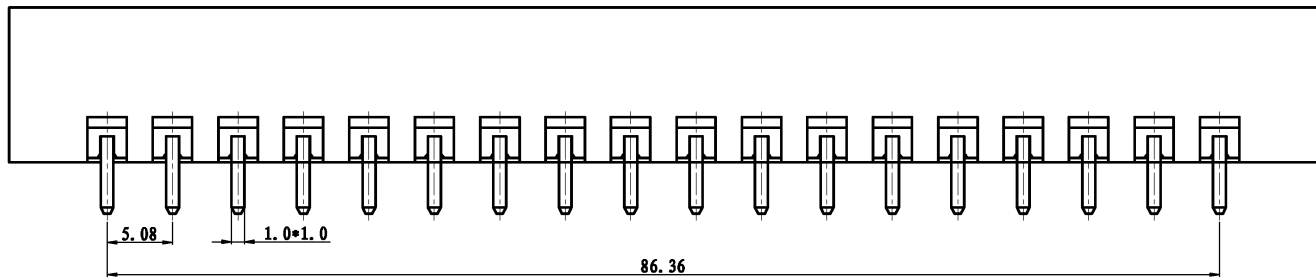
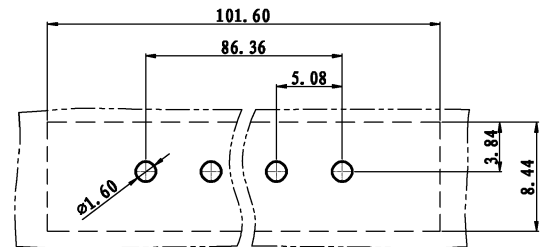


| REVISION RECORD | | | |
|-----------------|---------|------|------|
| REV. | CONTENT | MOD. | DATE |
| △ | 初版发行 | | |

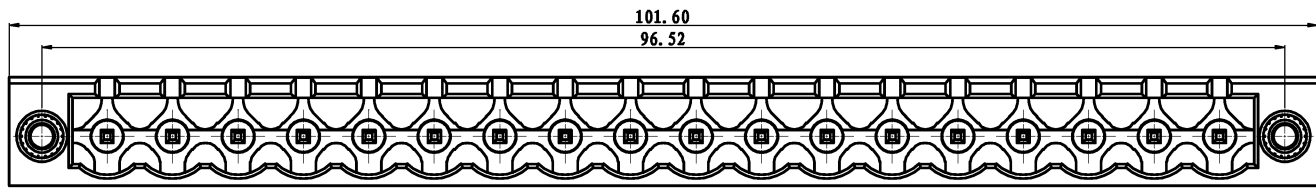

NOTES:
 Pitch : 5.08mm
 Rated Voltage : 300V
 Rated Current : 15A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 5MΩ / DC500V
 Using Temperature Range :
 -40℃ ~ +105℃

技术要求:
 间距: 5.08mm
 额定电压: 300V
 额定电流: 15A
 耐电压值: AC2500V/min
 绝缘阻抗: 5MΩ/DC500V
 使用条件: -40℃~+105℃

| | pitch dimension | | | Nominal dimension | | | | | — |
|----------------|-----------------|--------|---------|-------------------|---------|---------|----------|----------|---|
| | over 0 | over 6 | over 10 | over 0 | over 30 | over 60 | over 100 | over 150 | |
| variable range | to 6 | to 10 | to 24 | to 30 | to 60 | to 100 | to 150 | | □ |
| Tolerance | ±0.1 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 | ○ |

| 3. | LZ1-耳朵螺母 | SM00B250000V | 2 | 黄铜 | |
|--|------------------|--------------|-----------|----------|-----------------------|
| 2. | LZ1-5.08-直针(L.2) | 1015B0002AV | P | 黄铜 | 镀雾锡 |
| 1. | LZ1M-5.08-本体 | 1015M07XXAV | 1 | PA66 | |
| NO. | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |
| DES. | ARKINE | DATE | 2010/5/20 | UNITS | MM |
| CHK. | | | | SIZE | A4 |
| APP. | | DATE | | SCALE | 1:1 |
| | | | | DWG NO. | SP-2-1015003 |
| | | | | REV: | T0 |
| 上海联捷电气有限公司 Shanghai Bliker Electric C.O.,LTD | | | | TITLE | LZ1VM-5.08-18P-1Y-00A |
| | | | | | LZ1VM-5.08-成品 |