



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

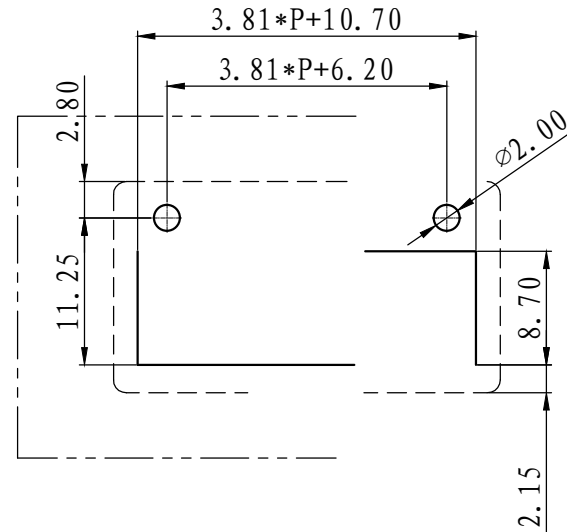

NOTES:
 Pitch : 3.81mm
 Rated Voltage : 300V
 Rated Current : 8A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range : 28~16 AWG

技术要求:
 间距: 3.81mm
 额定电压: 300V
 额定电流: 8A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 28~ 16AWG



3	LZ1-系列-耳朵螺母	SNM0250010V	2	黄铜	---
2	LZ5M-3.81-焊脚	1017B00010V	P	黄铜	镀雾锡
1	LZ5M-3.81-主体	1017M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-04-17	UNITS	MM
CHK.	DATE		SIZE	A4	THIRD ANGLE PROJECTION
APP.	DATE		SCALE	1:1	DWG NO.
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD					TITLE LZ5M-3.81-XXP-1Y-00A LZ5M-3.81-成品
					SHEET 1 of 1
					SP-2-1017001